
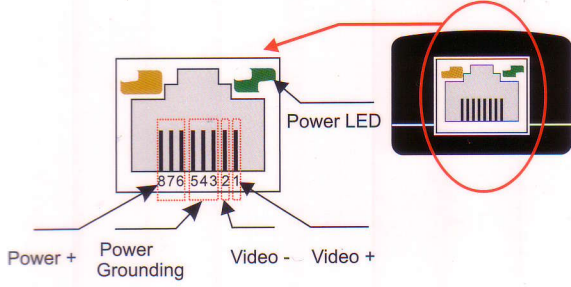


## Outer shell diagram

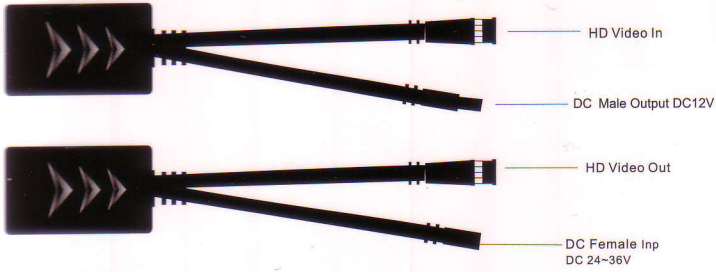

## Specification

Item	Specification				
Properties	Transmission signal	1 channel			
	HD Video transmission distance	HDCVI: 720P/400m; 1080P: 200M			
		HDTV: 720P/1080P: 200M			
		AHD: 720P: 300M; 1080P: 200M			
Power transmission distance	Input voltage	DC 24V	DC 36V		
	Distance	0-100M	100-200M	200-300M	0-300M
	Output (max)	DC 12V 10W	DC 12V 6W	DC 12V 3W	DC 12V 10W
Video transmission properties and port	Category Type	UTP CAT5/5E/6			
	Coaxial video connector	BNC-M			
	Twisted-pair video port	RJ-45			
	Compatible Format	HDCVI/HDTV/AHD			
	Resolution	720P/1080P			
	Network bandwidth	0-65 M			
Anti-interference	>60db				
Protection	ESD	1a contact discharge electricity level 3			
		1b air discharge electricity level 3			
		Per: IEC61000-4-2			
Impedance	Coaxial cable connector	2KV(common-code) Per: IEC1000-4-5			
	UTP Cable Connector	2KV(different-code), 4KV(common-code), Per: IEC1000-4-5			
Impedance	BNC male	75 ohms			
	UTP cable	100 ohms			
Physical Properties	Dimension (L*W*H)	72.6x42.5x24.5mm			
	Shell	ABS			
	Color	Black			
	N. W.	66.4g/57.4g			
Stability	MTBF	>10000H			
	Operating Temperature	-10-55°C			
Environmental	Storage Temperature	-20-70°C			
	Humidity	0-95% (non-condensing)			